



#### **Technical specifications**

reemineur speemeurions	
Fan diameter:	Ø 960 mm (37.79")
Number of fan blades:	6
PTO output:	90 - 110 hp (66 - 81 KW)
PTO:	540/750/1000 RPM
Drive:	Power take-off
Required hydraulics:	180 bar - 40 l/min.
Required hydraulic connections:	2x double acting minimum
Weight:	depending on configuration
Air capacity:	390 m³/min.
Noise level:	85 dB(A)
Loading capacity:	10 - 12 - 14 - 16 - 20 m³
Working width	6 - 8 m
Tyres:	505/50R17 or 435


Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine. Not all products are available in all countries.






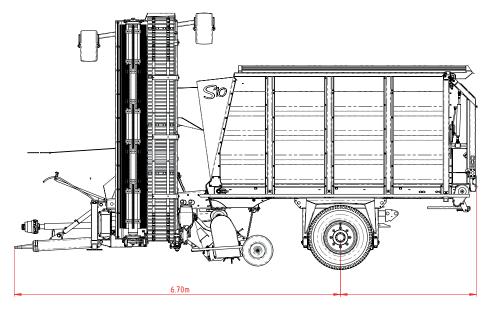

### 10 m<sup>3</sup>



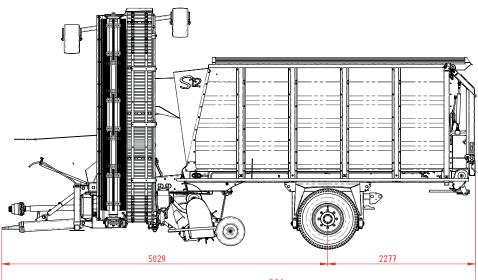



Measures are in mm

12 m<sup>3</sup>

Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine. Not all products are available in all countries.







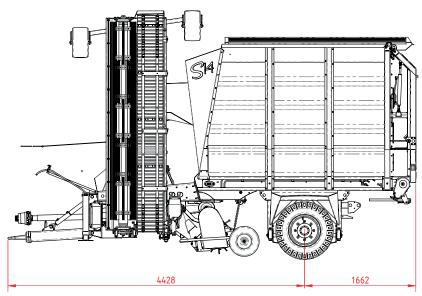

Measures are in mm

14 m<sup>3</sup>

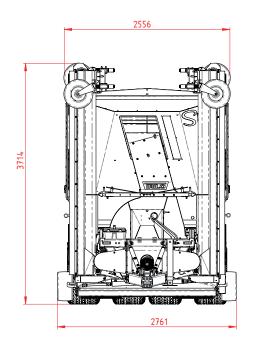

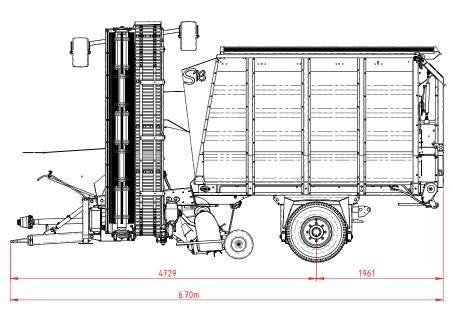



Measures are in mm

16 m<sup>3</sup>

Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine. Not all products are available in all countries.






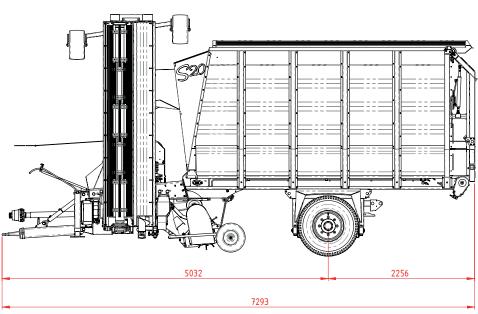

20 m<sup>3</sup> Measures are in mm



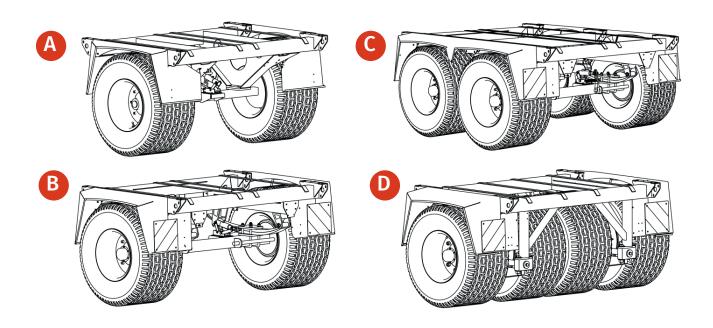

Bogie Type	Α	В	C	D
Overall Width	Single 2.00 m	Single 2.30 m	Tandem 2.30 m	Pendling 2.50 m
Parabolic Spring	-	•	•	•
Dual Air Brakes	•	•	•	•
Dual Hydrolic Brakes	•	•	•	•
Single Hydrolic Brakes	•	•	•	•
Overun Brakes	•	•	-	-
Lawn Tyres 500/50R17	•	•	•	•
Ridemax 500/50R17 Tyres	•	•	•	•
Marathon 435/50R19 Tyres	•	•	•	-
Available on model:				
S8	•	•	-	-
S10	•	•	•	•
S12	-	•	•	•
S14	-	•	-	•
S16	-	-	•	•
S20	-	-	•	•